



FEEL THE SW DIFFERENCE®

# DURABILITY THAT'S ON CALL FOR THE TOUGHEST OF JOBS.

## MegaMan®

MM-128-110-DRK/ECO-BK  
POWDER-FREE ECOTEK® BIODEGRADABLE  
SINGLE-USE GLOVES WITH DRITEK®\*

(Megaman®)

### SWEAT MANAGEMENT AND ANSI LEVEL 3 ABRASION RESISTANCE FOR THE ULTIMATE IN COMFORT AND PERFORMANCE

- DriTek® Comfort Technology with absorbent lining wicks away moisture for all day comfort
- EcoTek® Biodegradability Technology accelerates landfill breakdown without any performance loss\*
- ANSI/EN Level 3 abrasion resistance for durability and extended wear
- Fully textured surface for excellent grip
- Optimal thickness for durability and tactile sensitivity
- Up to 3x longer lasting than standard nitrile gloves
- SHA Dermatologically Approved



ANSI Level 3  
Abrasion resistance

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

**MM** MM-128-110-DRK/ECO-BK

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
12.8g (large size)	11.0" 280mm	8.5 mil	DriTek® EcoTek®	BLACK

ECOTEK

DriTek® EcoTek®



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW® and its affiliates.  
©2020 SW®. All rights reserved.



# TECHNICAL DATA



## MM-128-110-DRK/ECO-BK POWDER-FREE ECOTEK® BIODEGRADABLE SINGLE-USE GLOVES WITH DRITEK®\*

(Megaman®)



### PRODUCT DESCRIPTION

#### SPECIFICATIONS

PRODUCT	MegaMan
GRADE	Powder-Free Industrial
MATERIAL	Nitrile
THICKNESS FINGER	10.1mil 0.26mm
PALM	8.5mil 0.22mm
CUFF	7.0mil 0.18mm
COLOR	Black
SURFACE OUTER	Fully Textured
INNER	DriTek®
LENGTH	11" 280mm
WEIGHT	12.8g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China

#### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	17 MPa	16 MPa
ELONGATION:	560%	520%

#### INTEGRATED TECHNOLOGIES

**DRITEK®** Comfort Technology: Advanced flock lining is a powder-free, soft cotton-like nitrile glove lining that wicks away moisture for added comfort in extended use.


**ECOTEK®** Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.\*

100% Air Inspected

\* Specifications based on size Large glove

### STANDARDS & CERTIFICATIONS

EN 420:2003	FDA 21 CFR 177.2600
REACH EU 1907/2006	Component materials comply with FDA
EU 2016/425	regulations for food contact
ANSI/ISEA 105-2016	
CAT III COMPLEX DESIGN	

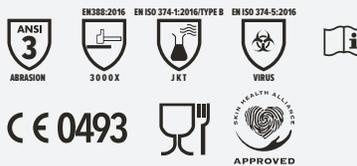

Please visit [swsafety.com/symbols](http://swsafety.com/symbols) for information on standards used on this document.

### ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260881	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
N260882	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
N260883	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
N260884	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
N260885	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260886	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case
N260887	3XL 11½ – 12	5.3" 134mm	50 gloves per box 10 boxes per case

### APPLICATIONS

- Assembly
- Chemical Handling
- Fabrication
- Janitorial Maintenance
- Light Machining Operations
- Maintenance
- Waste Management

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



R\_N26088X0920



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW® and its affiliates. ©2020 SW®. All rights reserved.



\*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.